




KOONUS- VENTILAATOR



Galvaniseeritud koonusventilaator on vastupidav ja suure jõudlusega ventilatsiooniseade, mis on mõeldud töötama ka kõige nõudlikumates põllumajanduslikes tingimustes. Tsingitud teraslehest korpus ja koonus (275 g/m² tsingikiht) tagavad suurepärase korrosioonikindluse ja pika eluea, samas kui roostevabast terasest aerodünaamilised labad pakuvad tugevat, suunatud õhuvoolu, vähendades energiakulu ja mürataset. Koonuskujuline väljalaskeava koondab õhu efektiivselt, tagades ühtlase ventilatsiooni ja madalama energiatarbimise. IP55 kaitseklassiga mootor on vee- ja tolmuindel ning F-klassi isolatsioon võimaldab töökindlust ka intensiivsel kasutusel. Neopreenist ja klaaskiust tugevdusega rihm tagab seadme pika tööea, samas kui automaatne sulgemismehhanism hoiab ära valguse ja tolmu sissetungi.

Spetsifikatsioon

Koonuse Suurus	Võimsus (kW)	Nimivool (A)	Nimipinge (V)	RPM	Õhuvool (m ³ /h)	Dimensioonid (mm)
36"	0.4	1.25	380	1440	21000	1000*1000*1080
50"	1.1	2.8	380	1440	49500	1380*1380*1180

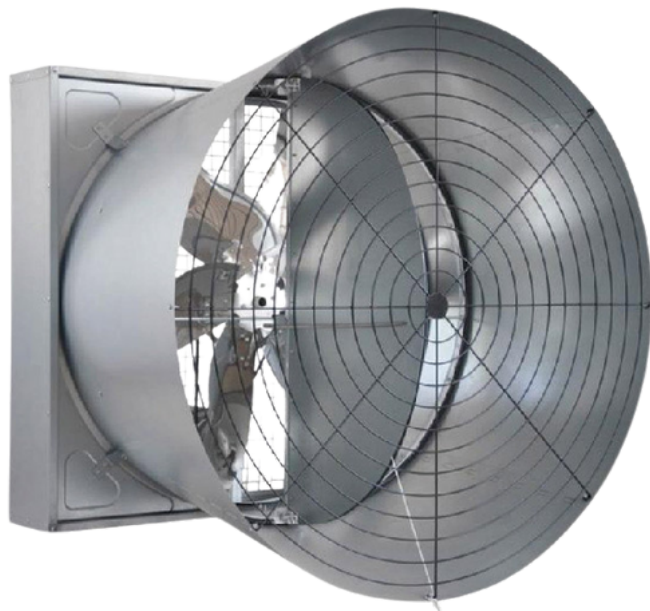

CONE FAN

The galvanized cone fan is a durable, high-performance ventilation unit designed to operate reliably even in the most demanding agricultural environments. The housing and cone are made of galvanized steel sheet with a 275 g/m² zinc coating, providing excellent corrosion resistance and long service life. Stainless steel aerodynamic blades deliver strong, directed airflow while reducing energy consumption and noise levels. The cone-shaped outlet efficiently concentrates airflow, ensuring uniform ventilation and lower energy usage. The IP55-rated motor is protected against water and dust, and Class F insulation ensures reliable operation even under intensive use. A neoprene belt reinforced with fiberglass extends the unit's service life, while the automatic shutter mechanism prevents the ingress of light and dust.

Specification

Cone Size	Power (kW)	Current (A)	Voltage (V)	RPM	Airflow (m³/h)	Dimensions (mm)
36"	0.4	1.25	380	1440	21000	1000*1000*1080
50"	1.1	2.8	380	1440	49500	1380*1380*1180